



# UNITED STATES PATENT AND TRADEMARK OFFICE

5312

UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office  
Address: COMMISSIONER OF PATENTS AND TRADEMARKS  
P.O. Box 1450  
Alexandria, Virginia 22313-1450  
www.uspto.gov

APPL NO.	FILING OR 371 (c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	DRAWINGS	TOT CLMS	IND CLMS
10/437,241	05/14/2003	2854	750	P 0303562/T4AO003S0275-1	3	13	2

CONFIRMATION NO. 3966

00909  
PILLSBURY WINTHROP, LLP  
P.O. BOX 10500  
MCLEAN, VA 22102

## FILING RECEIPT



\*OC000000010543558\*

Date Mailed: 07/23/2003

Receipt is acknowledged of this regular Patent Application. It will be considered in its order and you will be notified as to the results of the examination. Be sure to provide the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION when inquiring about this application. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please write to the Office of Initial Patent Examination's Filing Receipt Corrections, facsimile number 703-746-9195. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections (if appropriate).

## Applicant(s)

Shinichi Itoh, Kawasaki-shi, JAPAN;  
Yukio Asari, Yokohama-shi, JAPAN;

## Assignment For Published Patent Application

KABUSHIKI KAISHA TOSHIBA, Tokyo, JAPAN;

## Domestic Priority data as claimed by applicant

## Foreign Applications

JAPAN 2002-138514 05/14/2002

If Required, Foreign Filing License Granted: 07/22/2003

Projected Publication Date: 11/20/2003

Non-Publication Request: No

Early Publication Request: No

## Title

Paper sheet stamp apparatus

---

**LICENSE FOR FOREIGN FILING UNDER  
Title 35, United States Code, Section 184  
Title 37, Code of Federal Regulations, 5.11 & 5.15**

**GRANTED**

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Office of Export Administration, Department of Commerce (15 CFR 370.10 (j)); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

**NOT GRANTED**

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

TITLE OF THE INVENTION

PAPER SHEET STAMP APPARATUS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is based upon and claims the  
5 benefit of priority from prior Japanese Patent  
Application No. 2002-138514, filed May 14, 2002.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a paper sheet  
10 stamp apparatus which stamps the surface of a paper  
sheet conveyed at a constant speed.

2. Description of the Related Art

Paper sheet stamp apparatuses have heretofore been  
known such as a stamp apparatus for stamping a portion  
15 of a mail matter conveyed at a high speed, to which a  
postage stamp is attached, with a postmark.

This type of the stamp apparatus includes: a  
conveying belt pair running at a constant speed in a  
holding state of the opposite surfaces of the mail  
20 matter; a stamp hub for stamping a postage stamp  
portion of the conveyed mail matter with the postmark;  
and a backup roller rotatably disposed opposite to the  
stamp hub on a back-surface side of the mail matter.  
The backup roller presses the mail matter conveyed by  
25 the conveying belt pair onto the stamp hub by urging  
means such as a spring.

The stamp hub substantially has a D-shaped section

formed by cutting out a part of an outer peripheral surface, and a letterpress for the postmark is formed on the outer peripheral surface. The cutout portion of the stamp hub is stopped in a home position disposed  
5 opposite to a conveying path in an initial state. Moreover, during rotation, the letterpress on the outer peripheral surface of the stamp hub is pressed onto the postage stamp portion of the mail matter to stamp the portion with the postmark.

10 In general, the stamp hub is rotated by a driving force transmitted from a conveying motor for allowing the conveying belt pair to run. That is, the stamp hub is connected to the conveying motor via a clutch brake. Therefore, the clutch brake is connected in accordance  
15 with a timing when the mail matter is conveyed, and the stamp hub is rotated from the home position. Accordingly, the letterpress is pressed onto the postage stamp portion to stamp the portion with the postmark.

20 However, in the above-described conventional stamp apparatus, the clutch brake is connected and the driving force is transmitted to the stamp hub. It has therefore been difficult to rotate the stamp hub at the same peripheral speed as the conveying speed of the  
25 mail matter and to rotate the stamp hub at an appropriate timing. Therefore, when the letterpress of the stamp hub is pressed on the postage stamp portion

of the mail matter, a speed difference is generated between the letterpress and mail matter. There is a problem that the postmark warps or deviates.

#### BRIEF SUMMARY OF THE INVENTION

5           The present invention has been developed in consideration of the above-described respects, and an object thereof is to provide a paper sheet stamp apparatus which can securely and clearly stamp a surface predetermined position of a paper sheet  
10           conveyed at a relatively high speed.

          According to an aspect of the present invention, there is provided a paper sheet stamp apparatus comprising: a conveying mechanism which conveys a paper sheet at a constant speed via a conveying path; a  
15           sensor which detects the conveyed paper sheet; a stamp hub which stamps a first surface of the paper sheet detected by the sensor; a backup roller which rotates in a rolling contact with a second surface of the paper sheet so as to press the first surface of the paper  
20           sheet onto the stamp hub; and a first driving portion which independently drives the stamp hub so as to rotate the stamp hub at the constant speed, when at least the stamp hub contacts the paper sheet.

          According to another aspect of the present  
25           invention, there is provided a paper sheet stamp apparatus comprising: a conveying mechanism which conveys a paper sheet at a constant speed via a

conveying path; a sensor which detects the conveyed  
paper sheet; a stamp hub which stamps a first surface  
of the paper sheet detected by the sensor; a backup  
roller which rotates in a rolling contact with a second  
5 surface of the paper sheet so as to press the first  
surface of the paper sheet onto the stamp hub; a first  
driving portion which accelerates the stamp hub so that  
the stamp hub reaches the constant speed until the  
paper sheet conveyed via the conveying path contacts  
10 the stamp hub and which decelerates and stops the  
accelerated stamp hub; and a clutch which interrupts a  
driving force transmitted to the stamp hub from the  
first driving portion to rotate the stamp hub following  
the paper sheet conveyed at the constant speed, when  
15 the stamp hub contacts the paper sheet.

Additional objects and advantages of the invention  
will be set forth in the description which follows, and  
in part will be obvious from the description, or may be  
learned by practice of the invention. The objects and  
20 advantages of the invention may be realized and  
obtained by means of the instrumentalities and  
combinations particularly pointed out hereinafter.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated  
25 in and constitute a part of the specification,  
illustrate embodiments of the invention, and together  
with the general description given above and the

detailed description of the embodiments given below, serve to explain the principles of the invention.

FIG. 1 is a front view showing a schematic structure of a stamp apparatus according to a first embodiment of the present invention;

FIG. 2 is a timing chart showing an operation of a stamp hub of the stamp apparatus of FIG. 1;

FIG. 3 is a diagram showing a structure for transmitting a driving force of a conveying belt to a backup roller of the stamp apparatus of FIG. 1;

FIG. 4A is a diagram showing an imprint in a case in which the backup roller of the stamp apparatus of FIG. 1 is rotated at a speed equal to a conveying speed;

FIG. 4B is a diagram showing the imprint in a case in which the backup roller of the stamp apparatus of FIG. 1 is stopped;

FIG. 4C is a diagram showing the imprint in a case in which the backup roller of the stamp apparatus of FIG. 1 is rotated at a speed higher than the conveying speed;

FIG. 5 is a front view showing the schematic structure of the stamp apparatus according to a second embodiment of the present invention;

FIG. 6 is a timing chart showing the operation of the stamp hub of the stamp apparatus of FIG. 5;

FIG. 7A is a diagram showing the imprint in a case

in which the backup roller of the stamp apparatus of FIG. 5 is rotated following the mail matter; and

FIGS. 7B, 7C are diagrams showing the imprints in a case in which the driving force is continuously given to the backup roller of the stamp apparatus of FIG. 5.

#### DETAILED DESCRIPTION OF THE INVENTION

Embodiments of the present invention will be described hereinafter in detail with reference to the drawings.

FIG. 1 shows a schematic structure of a stamp apparatus 1 (paper sheet stamp apparatus) according to a first embodiment of the present invention. Here, the stamp apparatus 1 will be described for stamping a portion of a mail matter conveyed at a relatively high speed (3.8 m/s in the present embodiment), to which a postage stamp is attached (hereinafter referred to simply as the postage stamp portion), with a postmark.

The stamp apparatus 1 includes a conveying belt pair 2 (conveying mechanism) which runs in an arrow T direction in the drawing at a constant speed in a holding/binding state of the mail matter. In further detail, the conveying belt pair 2 includes: a conveying belt 21 extended to be brought in a face contact with the surface (first surface) on a side to which the postage stamp is attached; and a conveying belt 22 disposed opposite to the conveying belt 21 via a conveying path and extended to be brought in the face



contact with the surface (second surface) of the mail matter on an opposite side.

Here, the apparatus including one pair of conveying belts 21, 22 will be described. However, a plurality of pairs of belts may be extended/arranged along a conveying direction in a positional relation via the conveying path.

In a position brought in a rolling contact with the first surface of the mail matter conveyed by the conveying belt pair 2, a substantially cylindrical stamp hub 4 for stamping the postage stamp portion with a postmark is disposed. The stamp hub 4 has the rolling contact with the first surface of the mail matter in a predetermined position deviating on a rear side (paper surface inner direction) of the apparatus from the conveying belt 21. The stamp hub 4 has a section formed substantially in a D-shape. In the outer peripheral surface of the hub, an effective region 3 in which a letterpress (not shown) for the postmark is formed, and a non-contact region 5 which does not contact the first surface of the mail matter during rotation are continuously disposed along a rotation direction.

The stamp hub 4 is stopped in a home position (position shown in FIG. 1) where the non-contact region 5 is disposed opposite to the conveying path in an initial state. This prevents the stamp hub 4 from

contacting the mail matter conveyed via the conveying path. Moreover, a gap adjustment mechanism (not shown) for adjusting a gap between the hub and conveying path is disposed in the stamp hub 4.

5           A rotation shaft 4a of the stamp hub 4 is directly connected to an AC servo motor 6 (first driving portion) having an output of 200 [W]. The AC servo motor 6 has a characteristic that a torque larger than that at a steady rotation time is generated at an  
10           acceleration/deceleration time, and is therefore appropriate for a driving source of the stamp hub 4 in which a timing of acceleration/deceleration needs to be switched with a high precision.

          FIG. 2 shows a state of a speed change at an  
15           operation time of the stamp hub 4. In the present embodiment, a pulse signal is supplied to the AC servo motor 6 to drive/control the hub.

          As shown in FIG. 2, when the mail matter is detected by a sensor 20 (FIG. 1), a driving pulse  
20           signal having a predetermined frequency is supplied to a motor driver (not shown) at an adjusted timing. The AC servo motor 6 rotates the stamp hub 4 based on the driving pulse signal, but the hub cannot momentarily be accelerated up to a predetermined speed. Therefore,  
25           a constant delay time  $d$  is generated until the predetermined speed is reached. The delay time  $d$  is determined by the stamp hub 4 and a peripheral inertial

system, and is constant. In consideration of this, a rotation start timing of the AC servo motor 6 is adjusted.

5 In the present embodiment, for the motor driving pulse, the pulse having a constant frequency corresponding to the conveying speed is supplied, an automatic correction function of the AC servo motor 6 is used, and an acceleration/deceleration time is set to be constant. That is, when the number of pulses for  
10 one rotation of the stamp hub 4 is supplied, a series of operation is automatically performed, and thereafter the hub stops in an initial position. Therefore, frequency modulation for acceleration/deceleration, and the like may not be performed, and the series of  
15 operation is performed with a simple control.

An ink supply roller 8 (ink supply portion) for supplying an ink to the letterpress is brought in the rolling contact with the outer peripheral surface of the stamp hub 4. The ink supply roller 8 includes a  
20 sponge portion soaked with an ink in the outer periphery of the roller.

In a position disposed opposite to the stamp hub 4 via the conveying path, a backup roller 10 is disposed. The backup roller 10 rotates in the rolling contact  
25 with the second surface of the mail matter so as to press the first surface of the mail matter conveyed via the conveying path onto the effective region 3 of the

stamp hub 4. That is, the backup roller 10 is also disposed in a position deviating on the rear side of the apparatus from the conveying belt 22.

5 The backup roller 10 is rotatably disposed on the tip end of rocking of an arm 12 disposed so that the arm can rock centering on a rotation shaft 11. In more detail, as shown in FIG. 3, the backup roller 10 is attached to a rotation shaft 13 projecting from the tip end of the arm 12 so that the roller can rotate.

10 Moreover, by an urging force of a spring 14 connected to a base end of the arm 12, the backup roller 10 is pressed/disposed toward the outer peripheral surface of the stamp hub 4. It is to be noted that a stopper 15 for regulating a rotation position of the arm 12 urged

15 by the spring 14 is disposed in a position adjacent to the base end of the arm 12. The stopper 15 regulates the rocking of the arm 12 in a position where the outer peripheral surface of the backup roller 10 is brought in the rolling contact with the effective region 3 of

20 the stamp hub 4 with a predetermined pressure.

Furthermore, as shown in FIG. 3, the backup roller 10 rotates by the driving force transmitted from the conveying belt 22. That is, a driving transmission roller 16 in the rolling contact on the back-surface

25 side of the conveying belt 22 is fixed/disposed adjacent to and coaxially with the backup roller 10. The driving transmission roller 16 is rotated by the

running of the conveying belt 22 so that the backup roller 10 is rotated. Therefore, the backup roller 10 rotates at the running speed of the conveying belt 22, that is, at the same peripheral speed as the conveying speed of the mail matter. It is to be noted that in the present embodiment, the conveying belt 22 is a flat belt, but a toothed belt obtained by attaching teeth to the back-surface side of the conveying belt 22 may also be used while the driving transmission roller 16 is replaced with a gear.

In the present embodiment, the backup roller 10 having a diameter of 50 mm is used to allow the driving transmission roller 16 having a diameter of 48 mm to abut on the conveying belt 22 having a thickness of 1.2 mm. Accordingly, the backup roller 10 is rotated at a speed equal to the conveying speed.

When the backup roller 10 is rotated at the speed equal to the conveying speed in this manner, normal stamping is possible with good reproducibility. FIG. 4A shows an imprint on the mail matter stamped by the stamp apparatus 1 of the present embodiment in which the backup roller 10 is rotated at the speed equal to the conveying speed.

On the other hand, FIG. 4B shows the imprint stamped without rotating the backup roller 10. In this case, the mail matter decelerates, the rotation speed of the stamp hub 4 becomes higher than the conveying

speed of the paper sheet, and the imprint has a contracted state along the conveying direction.

Moreover, FIG. 4C shows the imprint in a case in which the backup roller 10 is rotated at a speed higher than the conveying speed and the mail matter is stamped. In this case, the mail matter is accelerated, the rotation speed of the stamp hub 4 becomes lower than the conveying speed of the mail matter, and the imprint has an extended state along the conveying direction.

That is, when the backup roller 10 is rotated at the speed equal to the conveying speed as in the present embodiment, the normal stamping is possible with the good reproducibility.

Next, an acceleration/deceleration operation of the stamp hub 4 of the stamp apparatus 1 structured as described above will be described.

When the mail matter is conveyed in an arrow T direction via the conveying path and detected via the sensor 20, the rotation of the AC servo motor 6 is started at a predetermined timing and the rotation of the stamp hub 4 is started. The stamp hub 4 is stopped in a posture (home position) in which the non-contact region 5 is disposed opposite to the conveying path in the initial state before conveying the mail matter. From this state, the acceleration is started.

A rotation start timing of the AC servo motor 6 is

set to be adjusted to a timing at which the letterpress  
of the effective region 3 of the stamp hub 4 is pressed  
onto the postage stamp portion of the conveyed mail  
matter. Moreover, the acceleration of the stamp hub 4  
5 at this time is set to an acceleration such that the  
peripheral speed of the outer peripheral surface  
reaches the conveying speed (3.8 m/s) of the mail  
matter at a time when the effective region 3 starts  
contacting the first surface of the mail matter, that  
10 is, when the stamp hub 4 starts contacting the mail  
matter.

Moreover, the AC servo motor 6 rotates the stamp  
hub 4 at the same constant peripheral speed as the  
conveying speed of the mail matter, while the effective  
15 region 3 of the stamp hub 4 has the rolling contact  
with the first surface of the mail matter, that is, in  
a state in which the stamp hub 4 contacts the mail  
matter. Accordingly, at a stamping operation time when  
the letterpress disposed in the effective region 3 of  
20 the stamp hub 4 is pressed onto the postage stamp  
portion in the first surface of the mail matter, a  
speed difference can be prevented from being generated  
between the mail matter and stamp hub 4, and the  
predetermined position can securely and clearly be  
25 stamped with the postmark.

Furthermore, after the effective region 3 of the  
stamp hub 4 is detached from the first surface of the

mail matter, that is, after the stamp hub 4 does not  
contact the mail matter any more, the AC servo motor 6  
decelerates and stops the stamp hub 4 in the home  
position. That is, the deceleration of the AC servo  
5 motor 6 at this time is set to a value at which the  
stamp hub 4 stops in the home position.

In other words, the stamp hub 4 is rotated/  
controlled so that a series of acceleration/constant-  
speed/deceleration operation is completed during one  
10 rotation at the above-described timing.

As described above, according to the present  
embodiment, at a stamping operation time when the  
letterpress disposed in the outer peripheral surface of  
the stamp hub 4 is pressed onto the postage stamp  
15 portion of the mail matter to stamp the portion with  
the postmark, the AC servo motor 6 is rotated/  
controlled so that the stamp hub 4 rotates at the same  
peripheral speed as the conveying speed of the mail  
matter. Therefore, the speed difference can be  
20 prevented from being generated between the stamp hub 4  
and mail matter, and the postmark with respect to the  
postage stamp portion can securely and clearly be  
imprinted.

Moreover, according to the present embodiment,  
25 the driving force is transmitted from the conveying  
belts 21, 22 for conveying the mail matter in the  
holding/binding state, so that the backup roller 10 is



rotated at the same peripheral speed as the conveying speed. Therefore, when the mail matter passes between the backup roller 10 and stamp hub 4, the backup roller 10 rotates at the same peripheral speed as the  
5 conveying speed of the mail matter. This can prevent an undesired load from being supplied to the mail matter from the backup roller 10. That is, according to the present embodiment, the conveying speed of the mail matter can be prevented from changing by the load  
10 from the backup roller 10, and the postage stamp portion can securely and clearly be stamped with the postmark.

On the other hand, as in the related art, the mail matter is conveyed in a state in which the backup  
15 roller 10 stops. Then, when the mail matter contacts the backup roller 10, the mail matter receives a large load, the conveying speed of the mail matter changes, the speed difference is generated between the stamp hub 4 and mail matter, and the imprint warps. The present  
20 invention can solve such disadvantage.

It is to be noted that for the stamp apparatus 1 of the above-described embodiment, the apparatus including the AC servo motor 6 directly connected to the rotation shaft of the stamp hub 4 has been  
25 described. However, the stamp hub 4 may also be connected to the AC servo motor 6 via a driving force transmission mechanism such as a belt.

Next, a stamp apparatus 30 according to a second embodiment of the present invention will be described with reference to FIG. 5. This stamp apparatus 30 has substantially the same structure as that of the stamp apparatus 1 of the first embodiment except that an  
5 electromagnetic clutch 32 is disposed between the stamp hub 4 and AC servo motor 6. Therefore, constituting elements functioning in the same manner as those of the stamp apparatus 1 are denoted with the same reference  
10 numerals, and the detailed description thereof is omitted.

An endless belt 36 for transmitting the driving force is wound and extended between a pulley 34 attached to a rotation shaft 6a of the AC servo motor 6  
15 and a driving input end (not shown) of the electromagnetic clutch 32. Moreover, the rotation shaft 4a of the stamp hub 4 is directly connected to a driving output end (not shown) of the electromagnetic clutch 32.

20 When the electromagnetic clutch 32 is connected, the driving force of the AC servo motor 6 is transmitted to the stamp hub 4 via the pulley 34, belt 36, and electromagnetic clutch 32, and the stamp hub 4 is rotated. At this time, the rotation speed of the  
25 stamp hub 4 is set to be equal to the conveying speed of the mail matter. On the other hand, when the electromagnetic clutch 32 is disconnected, the driving

force transmitted from the AC servo motor 6 is interrupted, and the driving force is not transmitted to the stamp hub 4. At this time, the stamp hub 4 rotates following the mail matter in a state in which  
5 the hub is brought in the rolling contact with the first surface of the mail matter conveyed via the conveying path.

That is, the stamp apparatus 30 operates as follows.

10 In the stamp apparatus 30 of the present embodiment, the AC servo motor 6 is rotated in a standby state before the mail matter is conveyed. Moreover, when the mail matter is conveyed in the arrow T direction via the conveying path and detected via the  
15 sensor 20, the electromagnetic clutch 32 is connected at a predetermined timing. The driving force of the AC servo motor 6 is transmitted to the stamp hub 4, and the stamp hub 4 starts rotating.

The timing to connect the electromagnetic clutch  
20 32 is set to a timing at which the peripheral speed of the outer peripheral surface reaches the conveying speed (3.8 m/s) of the mail matter, at the time when the stamp hub 4 stopped in the home position starts rotating and the effective region 3 contacts the first  
25 surface of the mail matter, that is, when the stamp hub 4 starts contacting the mail matter.

Moreover, at the timing when the effective region

3 of the stamp hub 4 roll-contacts the first surface of the mail matter, that is, at the timing when the stamp hub 4 contacts the mail matter, the electromagnetic clutch 32 is disconnected and the driving force transmitted to the stamp hub 4 from the AC servo motor 6 is interrupted. Immediately after this, the stamp hub 4 roll-contacts the first surface of the mail matter conveyed via the conveying path and rotates following the mail matter. Furthermore, the letterpress (not shown) disposed in the effective region 3 is pressed onto the postage stamp portion in the first surface of the mail matter to imprint the postmark.

In the state in which the stamp hub 4 rotates following the mail matter, the postage stamp portion is stamped with the postmark in this manner. Accordingly, at the stamp operation time, the speed difference can substantially completely be prevented from being generated between the mail matter and stamp hub 4, and the postmark can securely and clearly be imprinted in the predetermined position.

Furthermore, after the effective region 3 of the stamp hub 4 is detached from the first surface of the mail matter, that is, after the stamp hub 4 does not contact the mail matter any more, the electromagnetic clutch 32 is connected, and the stamp hub 4 is decelerated and stopped in the home position.

As described above, according to the present embodiment, at the stamp operation time when the letterpress disposed in the outer peripheral surface of the stamp hub 4 is pressed onto the postage stamp portion of the mail matter to imprint the postmark, the driving force transmitted to the stamp hub 4 is interrupted and the stamp hub 4 is rotated following the mail matter. Therefore, the speed difference can substantially completely be prevented from being generated between the letterpress and postage stamp portion, and the postmark with respect to the postage stamp portion can securely and clearly be imprinted.

Especially when a relatively thick mail matter is treated, the mail matter is easily decelerated while passing through the stamp hub 4. Therefore, as in the present embodiment, it becomes effective to rotate/control the stamp hub 4. That is, the stamp hub 4 rotating following the mail matter decelerates together with the mail matter. Therefore, even when the mail matter undesirably decelerates at the stamp time, the speed difference can be prevented from being generated between the mail matter and stamp hub 4.

FIG. 6 shows the state of the speed change at the operation time of the stamp hub 4 in detail.

At the rotation start time of the stamp hub 4 (acceleration time), the driving pulse is supplied to a motor driver (not shown), the electromagnetic clutch

is connected, and the stamp hub 4 is rotated until the hub reaches the conveying speed. The motor driving pulse is set to be longer than a time when the electromagnetic clutch is connected.

5           Subsequently, when the stamp hub 4 contacts the mail matter, the electromagnetic clutch is disconnected, and the stamp hub 4 is freely rotated. At this time, if the electromagnetic clutch is disconnected before bringing the stamp hub 4 in contact  
10 with the mail matter, there is a possibility that the peripheral speed of the stamp hub 4 does not reach the conveying speed of the mail matter. In a worst case, the stamp hub 4 does not rotate following the mail matter. Therefore, after the stamp hub 4 contacts the  
15 mail matter, the electromagnetic clutch is disconnected.

To stop the stamp hub 4, the electromagnetic clutch is again operated, the driving pulse is supplied to the motor driver, and the stamp hub 4 is  
20 decelerated. Here, to prevent the stamping from being influenced at a stop time, after the stamping completely ends, the electromagnetic clutch is connected.

It is to be noted that in the present embodiment,  
25 the motor driving pulse is supplied only at the acceleration/deceleration time. However, even if the motor driving pulse is supplied all through the

rotation of the stamp hub 4, there is no problem. That is, when the electromagnetic clutch 32 is switched/controlled at the above-described timing, the AC servo motor 6 may constantly be rotated.

5           In any case, while the stamp hub 4 contacts the mail matter, the driving force is interrupted. Accordingly, the normal stamping with better reproducibility is possible. FIG. 7A shows the imprint of the postmark imprinted on the mail matter by the  
10           stamp apparatus 30 of the present embodiment. The imprint indicates a shape without any distortion as original.

          On the other hand, FIGS. 7B, 7C show the imprints of the postmarks in a case in which the driving force  
15           constantly continues to be supplied to the stamp hub 4 at the stamp time. FIG. 7B shows that a round portion of the imprint has warped because of transmission unevenness of the clutch, and FIG. 7C shows that a wavy line portion of the imprint is elongated. Moreover,  
20           this distortion also appears when the driving motor itself is defective or deteriorated. That is, in the present embodiment, such disturbance can be eliminated, and it is therefore seen that the constitution is  
25           strong against any defect or deterioration of a driving source.

          It is to be noted that the present invention is not limited to the above-described embodiments, and can

variously be modified within the scope of the present invention. For example, in the above-described embodiments, the stamping of the postage stamp portion of the mail matter with the postmark has been  
5 described. However, the present invention is not limited to this, and can also be applied to an apparatus for stamping paper sheets other than the mail matter.

Additional advantages and modifications will  
10 readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and representative embodiments shown and described herein. Accordingly, various modifications may be made without departing from the  
15 spirit or scope of the general invention concept as defined by the appended claims and their equivalents.



WHAT IS CLAIMED IS:

1. A paper sheet stamp apparatus comprising:  
a conveying mechanism which conveys a paper sheet  
at a constant speed via a conveying path;

5 a sensor which detects the conveyed paper sheet to  
acquire a stamp timing;

a stamp hub which stamps a first surface of the  
paper sheet detected by the sensor;

10 a backup roller which rotates in a rolling contact  
with a second surface of the paper sheet so as to press  
the first surface of the paper sheet onto the stamp  
hub; and

a first driving portion which independently drives  
the stamp hub so as to rotate the stamp hub at the  
15 constant speed, when at least the stamp hub contacts  
the paper sheet.

2. The paper sheet stamp apparatus according to  
claim 1, further comprising: a second driving portion  
which drives the backup roller so that the backup  
20 roller rotates at the constant speed.

3. The paper sheet stamp apparatus according to  
claim 2, wherein the conveying mechanism comprises a  
conveying belt pair which runs in a holding/binding  
state of the opposite surfaces of the paper sheet at  
25 the constant speed, and

the second driving portion allows the conveying  
belt pair to transmit a driving force so as to rotate

the backup roller.

4. The paper sheet stamp apparatus according to claim 1, wherein the first driving portion comprises a motor directly connected to a rotation shaft of the stamp hub.

5. The paper sheet stamp apparatus according to claim 4, wherein the motor is an AC servo motor.

6. The paper sheet stamp apparatus according to claim 1, wherein the stamp hub continuously includes an effective region in which a letterpress is formed and a non-contact region in which the hub does not roll-contact the first surface of the paper sheet on an outer peripheral surface of the hub, and

the first driving portion accelerates and rotates the stamp hub stopped in a home position in which the non-contact region is disposed opposite to the conveying path so that the speed of the outer peripheral surface reaches the constant speed at a time when the effective region starts contacting the first surface, rotates the stamp hub at the constant speed when the effective region roll-contacts the first surface, and decelerates and stops the stamp hub in the home position after the effective region is detached from the first surface.

7. A paper sheet stamp apparatus comprising:  
a conveying mechanism which conveys a paper sheet at a constant speed via a conveying path;

a sensor which detects the conveyed paper sheet to acquire a stamp timing;

a stamp hub which stamps a first surface of the paper sheet detected by the sensor;

5       a backup roller which rotates in a rolling contact with a second surface of the paper sheet so as to press the first surface of the paper sheet onto the stamp hub;

10       a first driving portion which accelerates the stamp hub so that the stamp hub reaches the constant speed until the paper sheet conveyed via the conveying path contacts the stamp hub and which decelerates and stops the accelerated stamp hub; and

15       a clutch which interrupts a driving force transmitted to the stamp hub from the first driving portion to rotate the stamp hub following the paper sheet conveyed at the constant speed, when the stamp hub contacts the paper sheet.

20       8. The paper sheet stamp apparatus according to claim 7, further comprising: a second driving portion which rotates the backup roller so that the backup roller rotates at the constant speed.

25       9. The paper sheet stamp apparatus according to claim 8, wherein the conveying mechanism comprises a conveying belt pair which runs in a holding/binding state of the opposite surfaces of the paper sheet at the constant speed, and

the second driving portion allows the conveying belt pair to transmit a driving force so as to rotate the backup roller.

10        10. The paper sheet stamp apparatus according to claim 7, wherein the first driving portion comprises a motor directly connected to a rotation shaft of the stamp hub.

11. The paper sheet stamp apparatus according to claim 10, wherein the motor is an AC servo motor.

10        12. The paper sheet stamp apparatus according to claim 7, wherein the clutch is an electromagnetic clutch.

13. The paper sheet stamp apparatus according to claim 7, wherein the stamp hub continuously includes an effective region in which a letterpress is formed and a non-contact region in which the hub does not roll-contact the first surface of the paper sheet during the rotation on an outer peripheral surface of the hub,

the first driving portion accelerates and rotates the stamp hub stopped in a home position in which the non-contact region is disposed opposite to the conveying path so that the speed of the outer peripheral surface reaches the constant speed at a time when the effective region starts contacting the first surface, and decelerates and stops the stamp hub in the home position after the effective region is detached from the first surface, and

the clutch interrupts the driving force transmitted to the stamp hub from the first driving portion, when the effective region roll-contacts the first surface.

ABSTRACT OF THE DISCLOSURE

A stamp apparatus having a conveying belt pair for conveying a mail matter in an arrow T direction, sensor for detecting the conveyed mail matter, a stamp hub  
5 which roll-contacts a postage stamp portion of the mail matter, rotates, and stamps the portion with a postmark, and a backup roller for pressing the conveyed mail matter onto the stamp hub. The stamp hub is directly connected to the AC servo motor, and is  
10 rotated at a speed equal to a conveying speed of the mail matter, when a effective region contacts the mail matter.

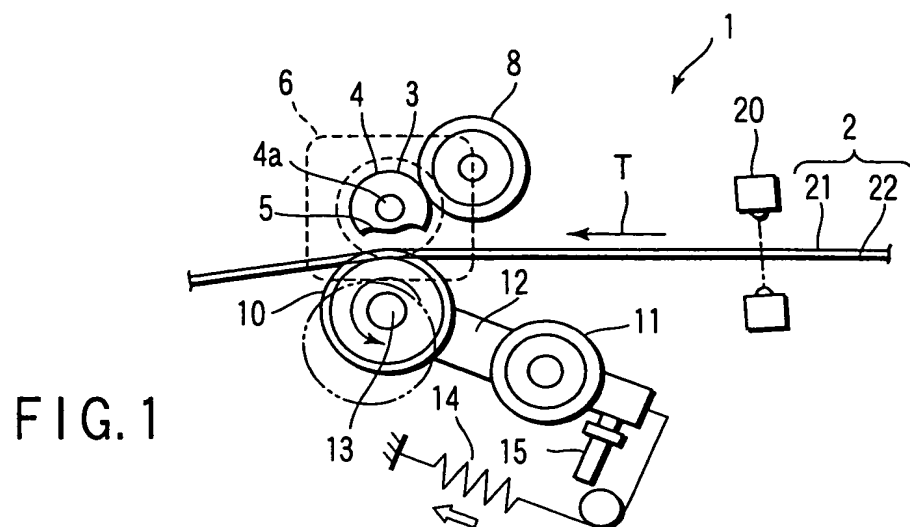


FIG. 1

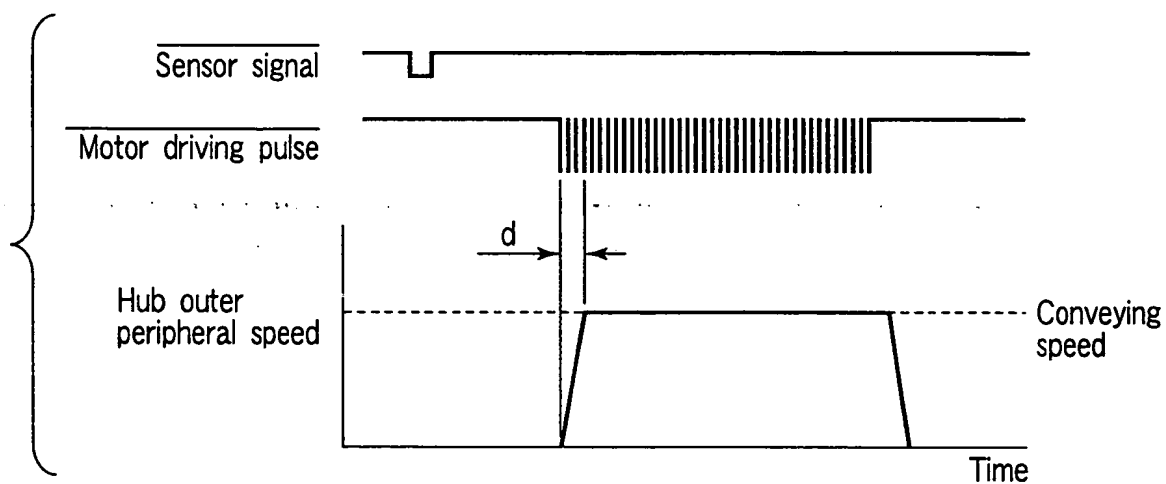


FIG. 2

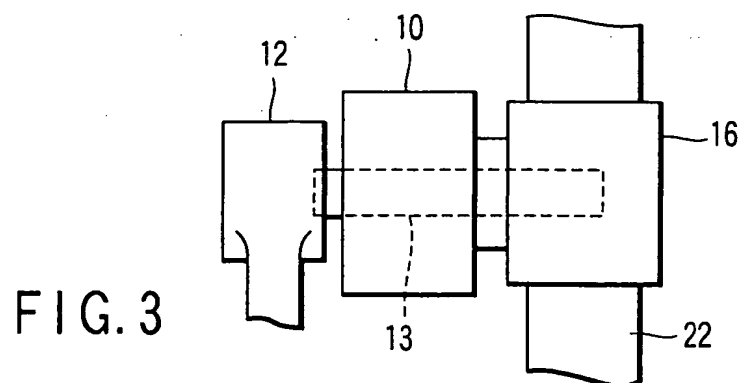


FIG. 3

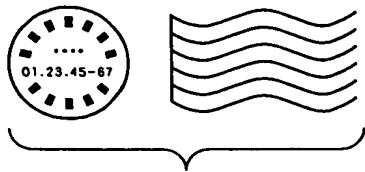


FIG. 4A




FIG. 4B

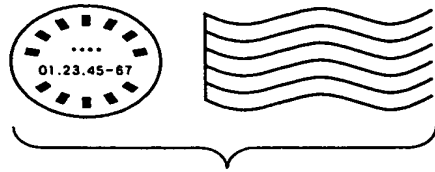


FIG. 4C

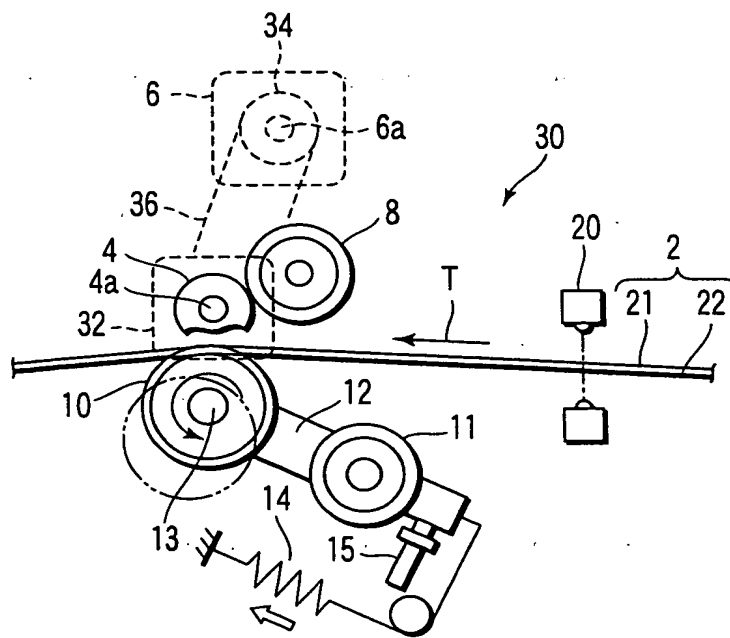


FIG. 5



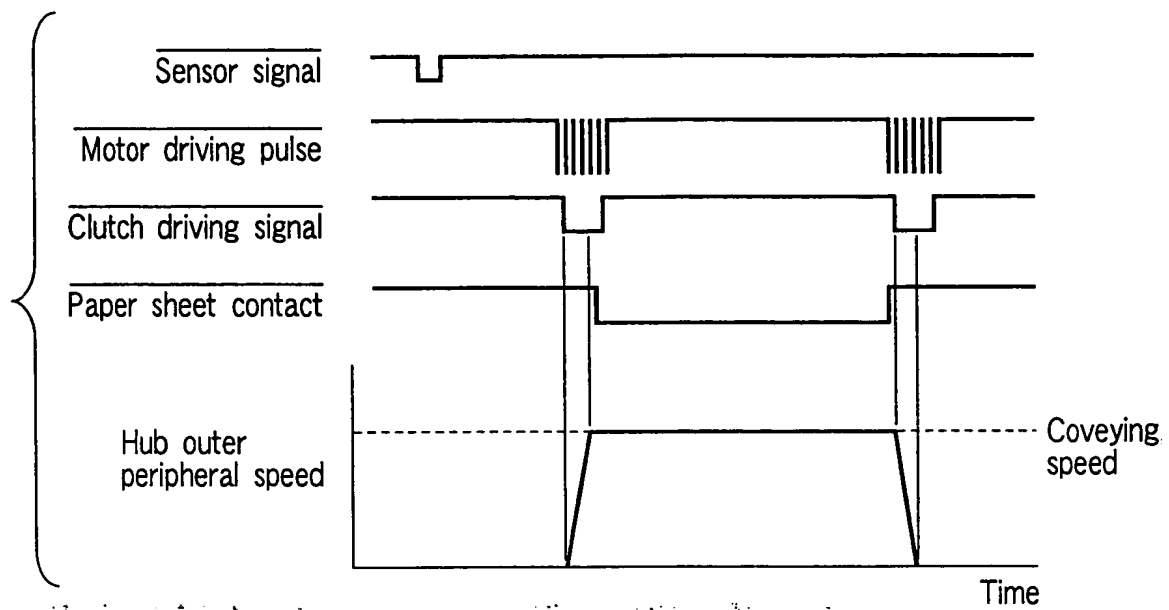


FIG. 6

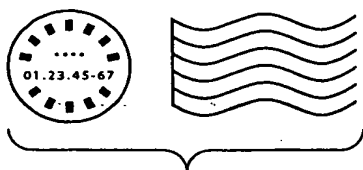


FIG. 7A

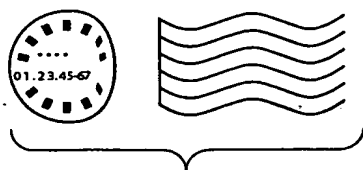


FIG. 7B

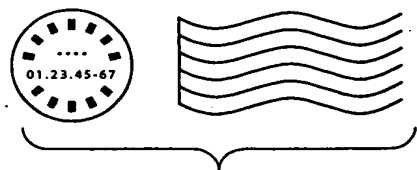


FIG. 7C